


Miniature Thermocouple Connectors

- Standard Cases of Color Coded Glass Filled Nylon
Temperature Rating of 350° F. (400° F. Max.)
- Hi-Temp Cases of Ryton® R-4 (Brown Only)
Temperature Rating of 500° F. (550° F. Max.)
- Polarity and Calibration Marked
- Negative Terminals Marked

Note: Specify "partial" if connectors are to be supplied without two nuts in the case without the two cover screws, with covers packed separately ready for installation of the cable clamps and tube adaptors. Specify "unassembled" if covers and screws are not installed, but packed separately.

PLUGS AND JACKS AVAILABLE	
ANSI CALIB	CASE COLOR
TYPE J.....	BLACK
TYPE K.....	YELLOW
TYPE T.....	BLUE
TYPE R/S.....	GREEN
TYPE E.....	PURPLE
TYPE N.....	ORANGE
TYPE U (copper/copper)...	WHITE


2-Pin Connectors

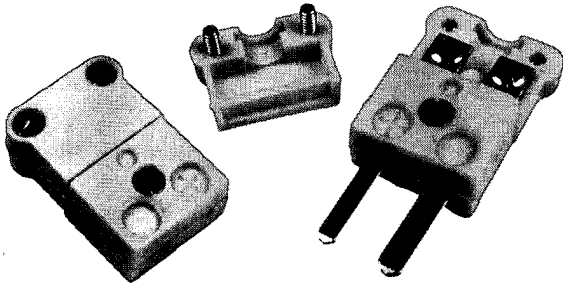

PART NUMBERS (Insert Calibration In Space After Number)

- H110 _____ (JKTRUEN) Miniature Plug
- H113 _____ (JK) Miniature Plug, Hi-Temp Case
- H120 _____ (JKTRUEN) Miniature Jack
- H122 _____ (JK) Miniature Jack, Hi-Temp Case

3-Pin Connectors

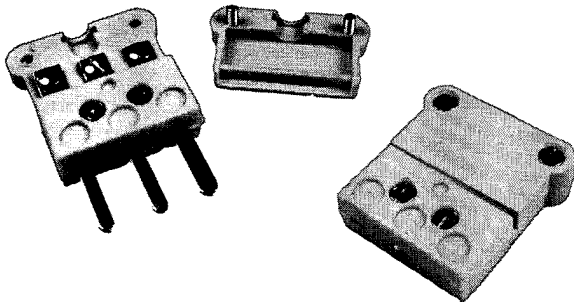

PART NUMBERS (Insert Calibration In Space After Number)

- H116 _____ (JKTRUE) Miniature 3 - Pin Plug
- H116U-HT Miniature 3 - Pin Plug, Type U
Hi-Temp Case, Nickel Plated Pins
- H126 _____ (JKTRUE) Miniature 3-Pin Jack
- H126U-HT Miniature 3 - Pin Jack, Type U
Hi-Temp Case, Nickel Plated Pins