


TYPE 504

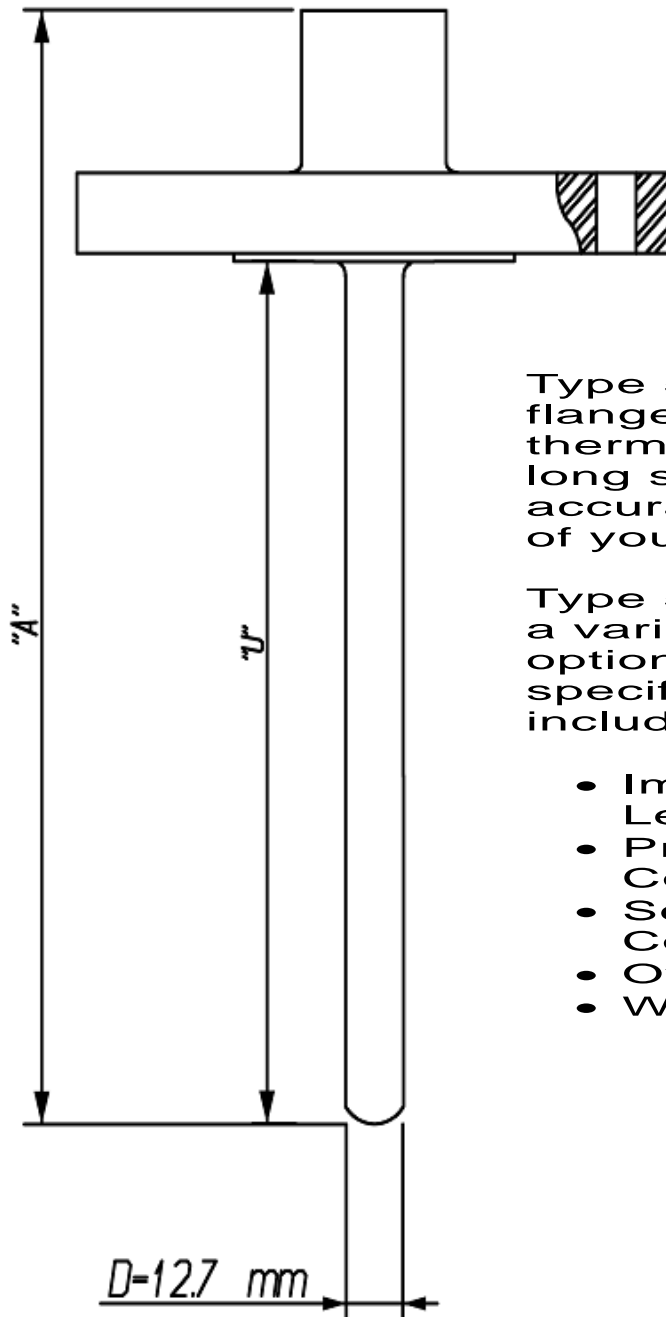

Type 504 is a standard flanged built-up thermowell, ensuring a long service life and accurate measurement of your process.

Type 504 is available in a variety of features and options to meet users' specific requirements, including:

- Immersion Length
- Process Connection
- Sensor Connection
- Overall Length
- Well Material

Michshur S.Z. (1984) Ltd.
8 Hagavish St.
P.O.B. 1951 Holon 5881614
ISRAEL
Phone: 972-3-6508585 Fax: 972-3-6508586

HOW TO ORDER

TABLE NO

1

2

3

4

5

EXAMPLE

ORDER NO 504

0100

1" ASA
150

1M

0250

8

Example Order No. = Type 504 flanged built up thermowell ; 100 mm immersion length ; 1" ASA 150 flange connection ; 1/2" NPT sensor connection ; 250 overall length ; 316 ST.ST.

Table 1. Dimension "U"

Insert "U" in mm.
(4 digit)

Table 2. Process Connection

Indicate flange details as per ASA Type

Table 3. Sensor Connection

Order	Description
1M	1/2" N.P.T
1R	1/2" B.S.P
1O	Other

Table 4. Dimension "A"

Insert "A" in mm.
(4 digit)

Table 5. Well Material

Order	Description
4	310 ST.ST
6	446 ST.ST
7	Hastelloy-C
8	316 ST.ST
9	304 ST.ST
10	Other

NOTES :

1. Standard diameter "D" is 12.7 mm.